




ID DIN 41612 Connectors, Styles B and C


For 1.27mm Ribbon Cable

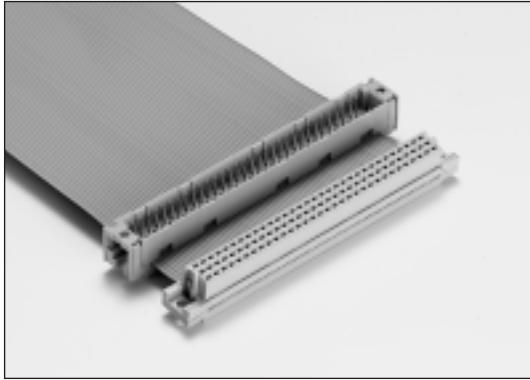

ID Connectors based on DIN 41612 loaded with 64/96 circuits for style C (row A, B, C or A, C) and 64 circuits for style B (row A, B). The male connector is only available with 64 circuits row A, C. Optional strain reliefs are available.

Material : Glass-filled Polyester, UL 94V-0
Contacts : Phosphor Bronze
Plating : Gold or Selective Gold over Nickel
Colour : Light Grey
Electrical : See Chapter 15

Female, 64 and 96 circuits

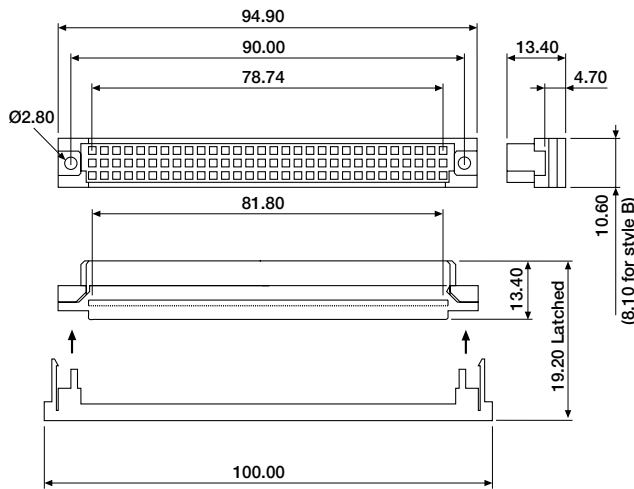


Drawing is representative of style C.

ORDERING INFORMATION

DFC-64BK-2202 64 circuits, style C (Row A+C)
DFC-96BK-2222 96 circuits, style C (Row A+B+C)

For the 96 circuits ID connector a special ribbon cable with 0.847mm spacing is available under order No. BKO-96ST-2800.

Male, 64 circuits

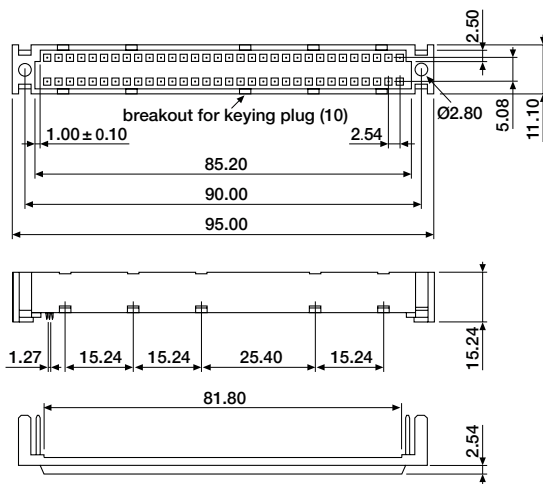

ORDERING INFORMATION

DMC-64BK-2202 64 circuits, style C
DMC-96BK-2222 96 circuits, style C