




4.50mm Rectangular Multi-Circuit Connectors


Wire to Wire

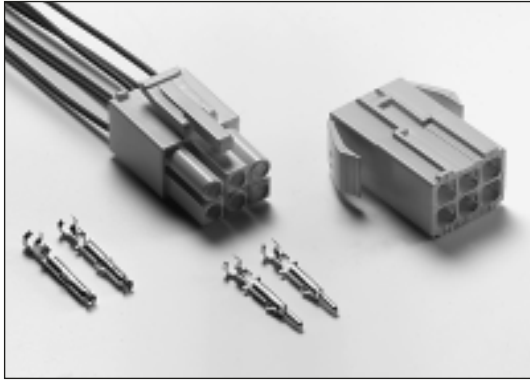

All contacts are individually protected by the housing. Housings are polarised and have large creeping distance and superior tracking resistance. Connectors are positive locked by arm lock system and are easy to release. Crimp type contacts have two locking lances for balanced position in the housing.

Material : 6/6 Nylon, UL 94V-2 (UL 94V-0 on request)
Contacts : Copper Alloy
Plating : Tin over Nickel
Electrical : See Chapter 15

■ Crimp type housing, female

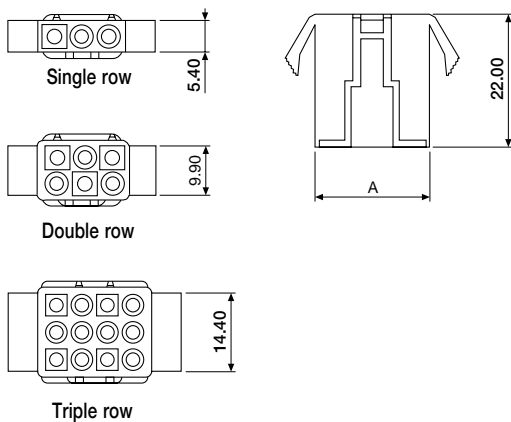

ORDERING INFORMATION

WWF-XXKK-0000


available circuit sizes:
02, 03, 04 (single row)
06 (double row)
09, 12, 15 (triple row)

WWF-XXKK-2000

available circuit sizes:
04 (2 x 2) not drawn

A = single row (N x 4.50) + 0.90
A = double row (N x 2.25) + 0.90
A = triple row (N x 1.50) + 0.90

■ Crimp type housing, male

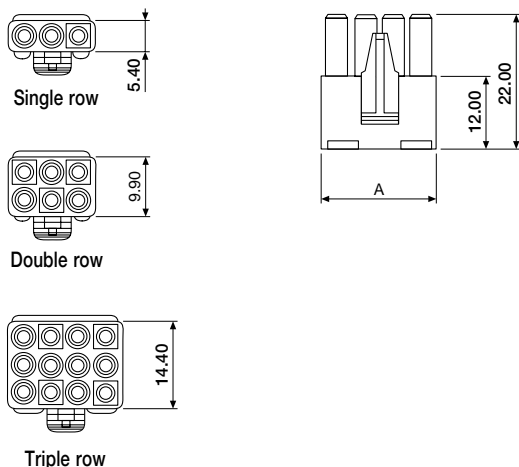

ORDERING INFORMATION

WWM-XXKK-0000

available circuit sizes:
02, 03, 04 (single row)
06 (double row)
09, 12, 15 (triple row)

WWM-XXKK-2000

available circuit sizes:
04 (2 x 2) not drawn


A = single row (N x 4.50) + 0.90
A = double row (N x 2.25) + 0.90
A = triple row (N x 1.50) + 0.90



4.50mm Rectangular Multi-Circuit Connectors

Wire to Wire

■ Crimp type terminals, loose

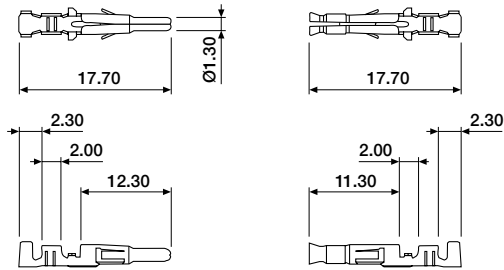

ORDERING INFORMATION

WWT-00KT-0000	female, AWG 20-26
WWT-00KT-1000	female, AWG 16-20
WWT-10KT-0000	male, AWG 20-26
WWT-10KT-1000	male, AWG 16-20
HGS -10WM-1100	hand crimp tool, AWG 18-28
HGS -40WH -1000	extractor

Contact sales office for terminals on reel.