




2.54mm Wire to Wire and Wire to Board Connectors



Single Row

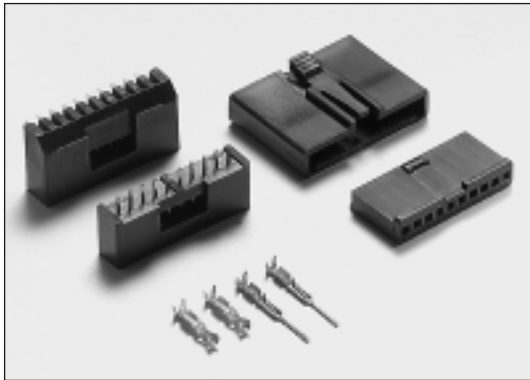

This series is available with male and female crimp type housings together with male headers, straight and right-angle. Wire to wire connectors are fully shrouded and positive locked. Wire to PCB connectors are friction locked and fully shrouded.

Material : Polyamide, UL 94V-0
Contacts : Phosphor Bronze (headers and female crimp contact)
Copper Alloy (male crimp contact)
Plating : Tin over Nickel
Electrical : See Chapter 15

■ Header, male, straight

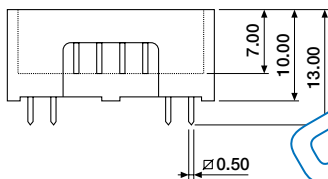
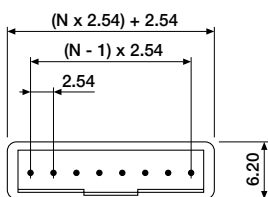


PCB Hole Size = Ø0.80mm

ORDERING INFORMATION

FKH-~~Y~~000-0000 tin plated
available circuit sizes:
03, 04, 05, 08, 10, 15

■ Header, male, right-angle

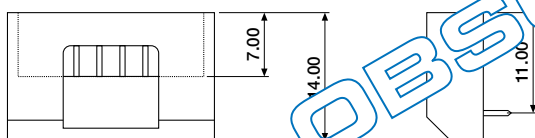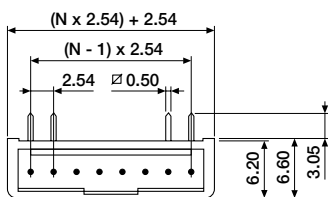

PCB Hole Size = Ø0.80mm

ORDERING INFORMATION



FKH-~~Y~~000-1000 tin plated
available circuit sizes:
03, 05, 08, 10, 15



2.54mm Wire to Wire and Wire to Board Connectors

Single Row

■ Crimp type housing, male


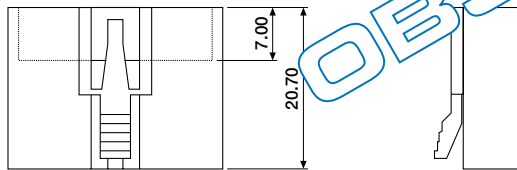
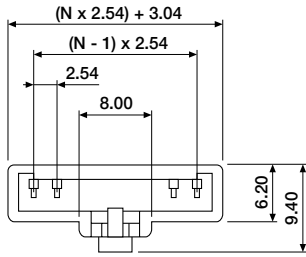


ORDERING INFORMATION

FKM-0000-0000

available circuit sizes:
03, 05, 08, 10, 15

■ Crimp type housing, female

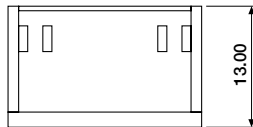
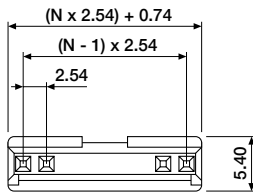


ORDERING INFORMATION

FKM-0000-0000

available circuit sizes:
03, 04, 05, 08, 10, 15

■ Crimp type terminals, loose

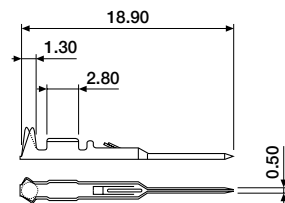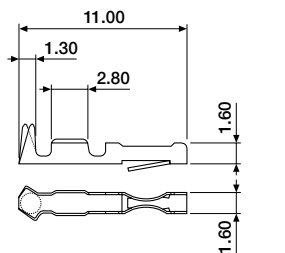

ORDERING INFORMATION

FKM-0000-0000

female, tin plated, AWG 24-28

FKM-10KT-0000

male, tin plated, AWG 24-28

HGS-00KT-1200

hand crimp tool, AWG 18-28

Contact sales office for reeled terminals.