




2.54mm Socket Strips


Standard and Low Profile

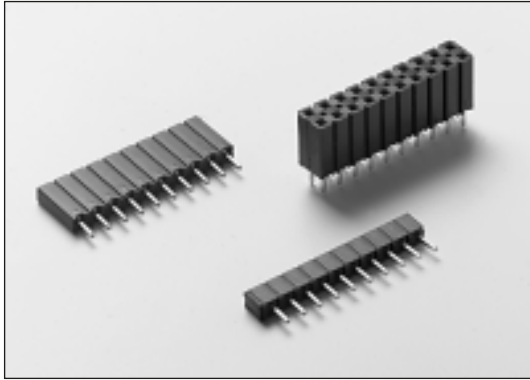

A series of single and double row socket strips in standard and low profile for top entry applications. These sockets are equipped with a double sided F-type contact. These socket strips can be sawn to the required circuit size.

Material : Glass-filled Polyester, UL 94V-0
Contacts : Full Hard Copper Alloy
Plating : Tin or Gold over Nickel
Tolerances : ±0.15mm
Electrical : See chapter 15

■ Single row, straight

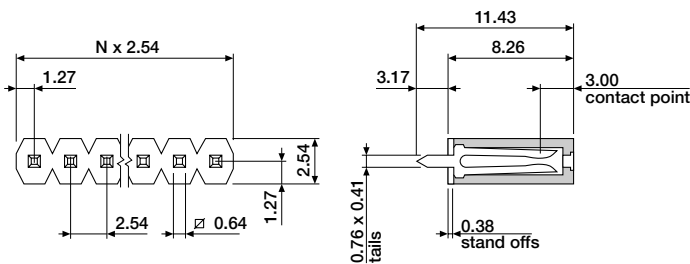


Recommended insertion depth = 5.97mm (max.)
PCB Hole Size = Ø1.00mm

ORDERING INFORMATION

ZSS-36DS-0000 36 circuits, tin plated
ZSS-36DS-0020 36 circuits, gold plated

Previously series 9297400-XX-XX
Other circuit sizes are available against M.O.Q.

■ Double row, straight

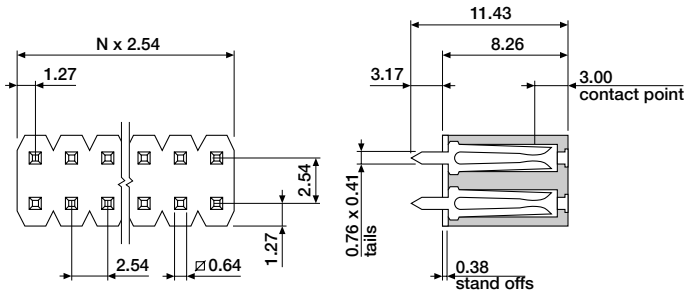


Recommended insertion depth = 5.97mm (max.)
PCB Hole Size = Ø1.00mm

ORDERING INFORMATION

ZSD-72DS-0000 72 circuits, tin plated
ZSD-72DS-0020 72 circuits, gold plated

Previously series 9297500-XX-XX
Other circuit sizes are available against M.O.Q.

■ Single row, straight, low profile

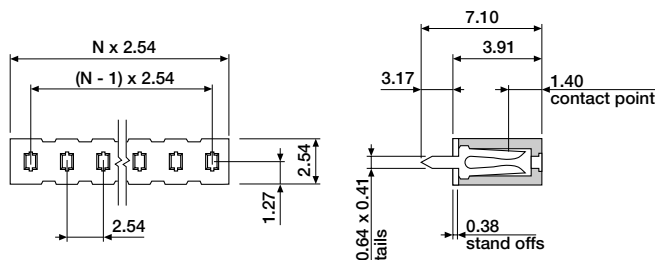

Recommended insertion depth = 2.67mm (max.)
PCB Hole Size = Ø1.00mm

ORDERING INFORMATION

ZSL-36DS-0000 36 circuits, tin plated
ZSL-36DS-0020 36 circuits, gold plated

Previously series 9297600-XX-XX
Other circuit sizes are available against M.O.Q.