




2.54 Breakable Socket Strips


Low Profile

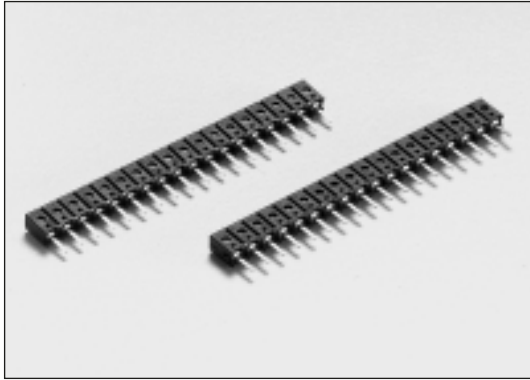


A series of low profile socket strips for top entry applications. Connectors will be supplied in strips of 25 circuits for the single row models and 50 circuits for the double row model.

Material : Glass-filled Polyester, UL 94V-0
Contacts : Phosphor Bronze
Plating : Tin or Selective Gold over Nickel
Packaging : 600mm tubes (220 contacts per tube)
Electrical : See Chapter 15

■ Single row, straight, low profile



PCB Hole Size = $\varnothing 0.80\text{mm}$




ORDERING INFORMATION


BM-25DS-00X0 25 circuits
0 = tin plated
7 = selective gold plated

Contact sales office for availability of other circuit sizes.

■ Double row, straight



PCB Hole Size = $\varnothing 0.80\text{mm}$



ORDERING INFORMATION

BM-50DS-00X0 50 circuits
0 = tin plated
7 = selective gold plated

Contact sales office for availability of other circuit sizes.