




1.27mm Socket and Header Strips


Machine Tooled Contacts

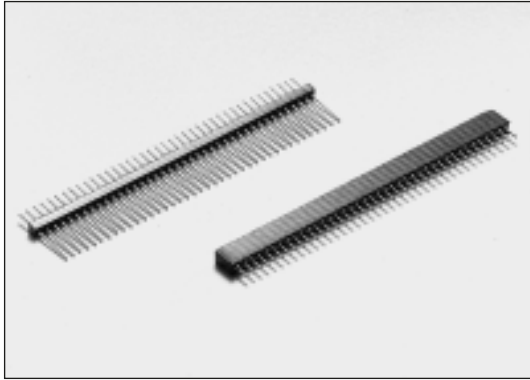

A series of miniature socket and header strips for high density applications. Socket contacts accept round wire from 0.40mm to 0.50mm

- Material : Glass-filled Polyester, UL 94V-0
- Contact : Beryllium Copper clip and Brass shell (female)
Brass (male)
- Plating : Gold over Nickel clip and pins (male)
Tin over Nickel shell (female)
- Electrical : See Chapter 15

■ Socket, straight

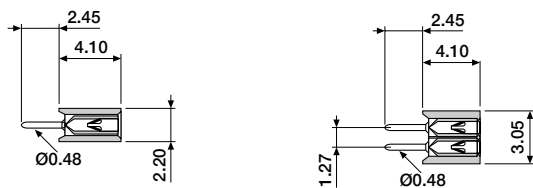


PCB Hole Size = Ø0.60mm

ORDERING INFORMATION

- SSM-XXDS-0020 single row
- SDM-XXDS-0020 double row
- available circuit sizes:
 - 40 (single row)
 - 80 (double row)

Other circuit sizes are available against M.O.Q.

■ Socket, right-angle

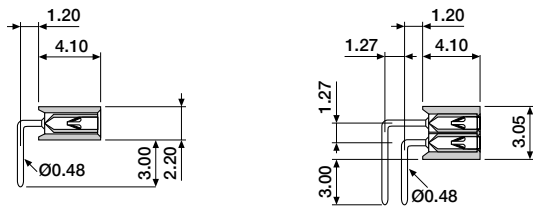


PCB Hole Size = Ø0.60mm

ORDERING INFORMATION

- SSM-XXDS-1020 single row
- SDM-XXDS-1020 double row
- available circuit sizes:
 - 40 (single row)
 - 80 (double row)

Other circuit sizes are available against M.O.Q.

■ Header, straight

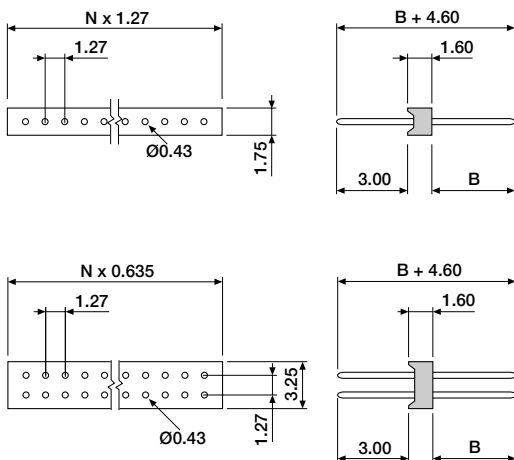

PCB Hole Size = Ø0.50mm

ORDERING INFORMATION

- HSM-XXDS-0X20 single row
- HDM-XXDS-0X20 double row
- 0 for B = 3.00
- 1 for B = 3.60
- 2 for B = 6.60
- 3 for B = 7.90
- 4 for B = 10.00
- available circuit sizes:
 - 40 (single row)
 - 80 (double row)


Other circuit sizes are available against M.O.Q.



1.27mm Socket and Header Strips

Machine Tooled Contacts

■ Header, right-angle

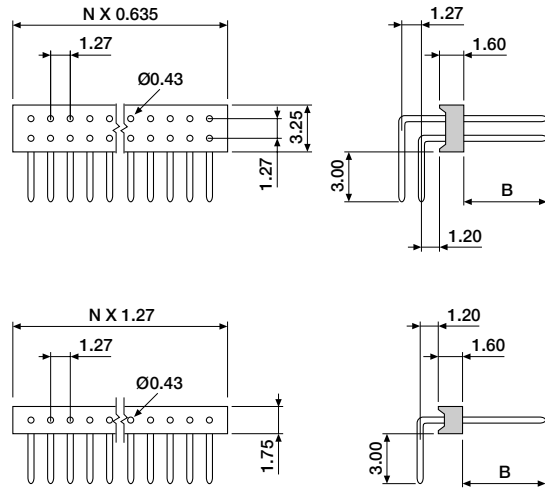

PCB Hole Size = Ø0.50mm

ORDERING INFORMATION

HSM-XXDS-1X20	single row
HDM-XXDS-1X20	double row
	0 for B = 3.00
	1 for B = 3.60
	2 for B = 6.60
	3 for B = 7.90
	4 for B = 10.00
	available circuit sizes:
	40 (single row)
	80 (double row)

Other circuit sizes are available against M.O.Q.