




Flat Conductor Cable Connectors


Spacing 2.54mm, LIF

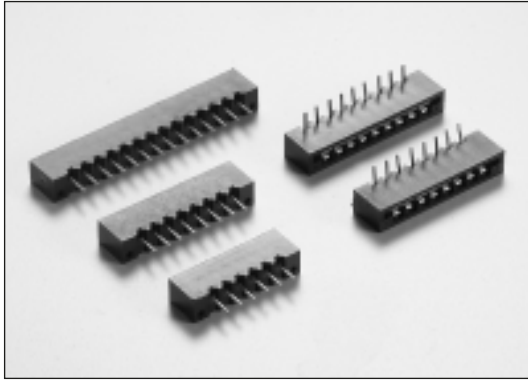

The most popular 2.54mm spacing connector for flat conductor cable or membrane switch tails. Double sided contacts allow for great design flexibility.

Material : Glass-filled Nylon UL 94V-0
Contacts : Copper Alloy
Plating : Tin over Copper
Electrical : See Chapter 15

■ PCB-mounting, straight

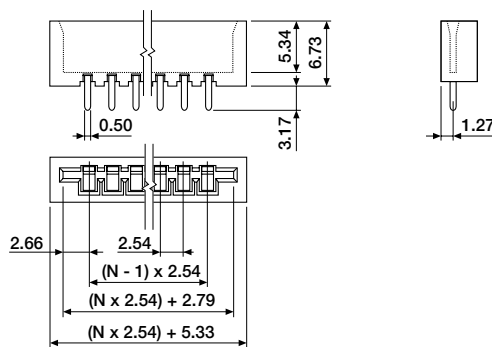


ORDERING INFORMATION

FAL-XXDS-0200 cable thickness 0.10 to 2.54mm
available circuit sizes:
03 to 21 circuits (all circuit sizes available)

Tail contact length = 3.05mm minimum

■ PCB-mounting, right-angle

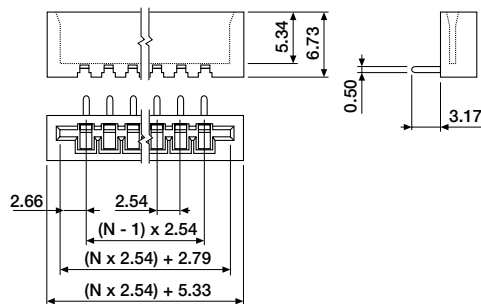


ORDERING INFORMATION

FAL-XXDS-1200 cable thickness 0.10 to 2.54mm
available circuit sizes:
03 to 21 circuits (all circuit sizes available)

Tail contact length = 3.05mm minimum

■ Contact detail/tail layout

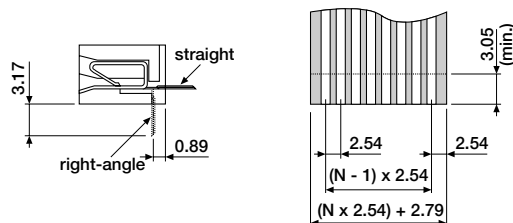

Double sided contact