




Flat Conductor Cable Connectors


Spacing 2.54mm, ZIF

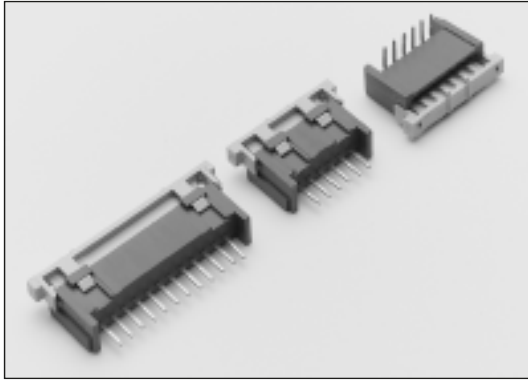

These connectors provide an excellent contact due to the pressure exerted when the latching cover will be closed. Contact is double sided. Straight and right-angle models are available.

Material : PBT UL 94V-0
Contacts : Phosphor Bronze
Plating : Tin over Nickel
Electrical : See Chapter 15

■ PCB-mounting, straight

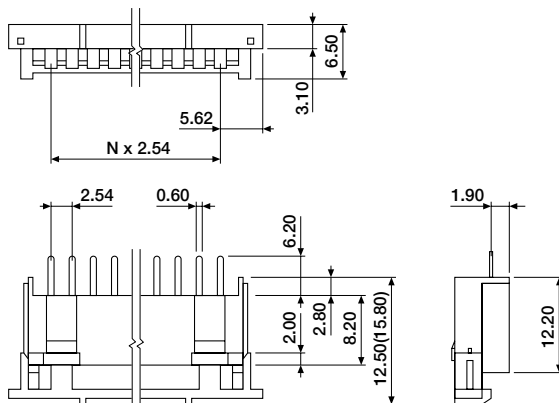


PCB Hole Size = Ø0.80mm

ORDERING INFORMATION

FAZ-XXDS-0200 cable thickness 0.08 to 0.25mm
available circuit sizes:
05 to 22

Dimensions between () are for open position.

■ PCB-mounting, right angle

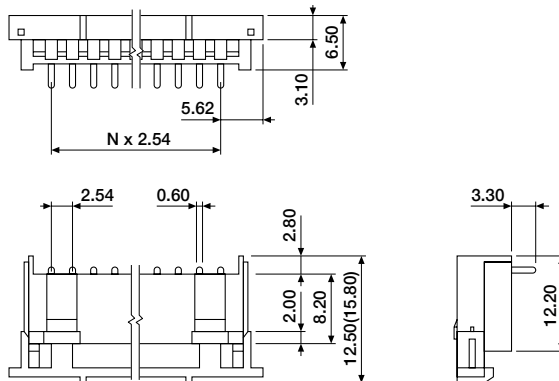


PCB Hole Size = Ø0.80mm

ORDERING INFORMATION

FAZ-XXDS-1200 cable thickness 0.08 to 0.25mm
available circuit sizes:
05 to 22

Dimensions between () are for open position.


■ Tail layout

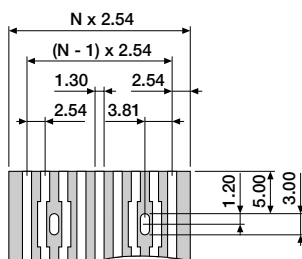



Flat Conductor Cable Connectors


Spacing 2.54mm, ZIF

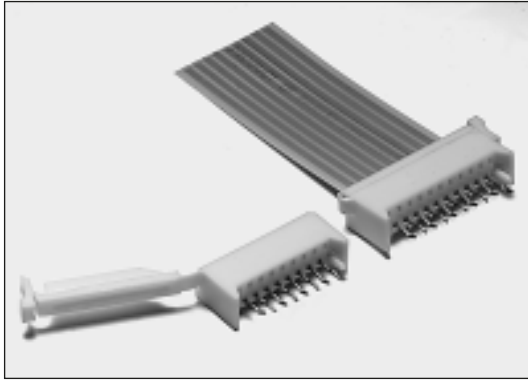

These connectors provide an excellent contact due to the pressure exerted when the latching cover will be closed. Contact is double sided. Straight and right-angle models are available.

Material : Polyamide UL 94V-0
Contacts : Phosphor Bronze
Plating : Tin over Nickel
Electrical : See Chapter 15

■ PCB-mounting, straight

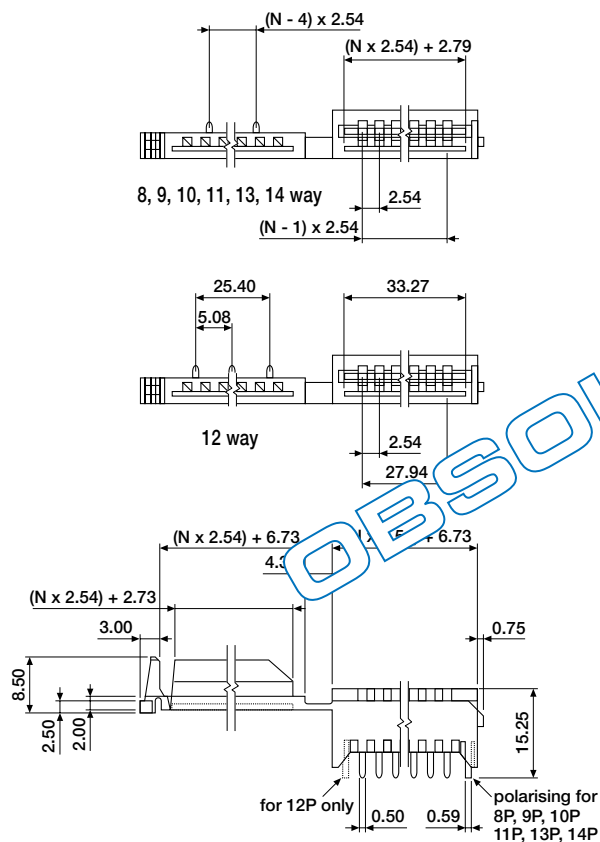

ORDERING INFORMATION

FAZ-XXDS-2209

cable thickness 0.13 to 0.38mm

available circuit sizes:
08, 09, 10, 11, 12, 13, 14

■ PCB layout/tail layout

