




# Flat Conductor Cable Jumpers


## 2.54 and 1.25mm Spacing

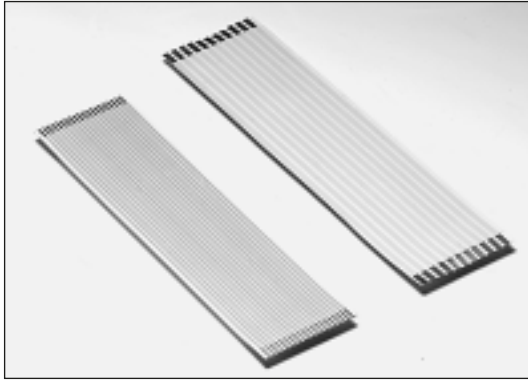

These compact, lightweight and thin flat cable jumpers are ideal for designing miniature equipment and high density mounting in combination with available FFC connectors. For greater flexibility, conductor thickness can be reduced to 0.05 or 0.035mm.

Conductor : Tin Coated Copper, 0.10 thick

### ■ 2.54mm spacing

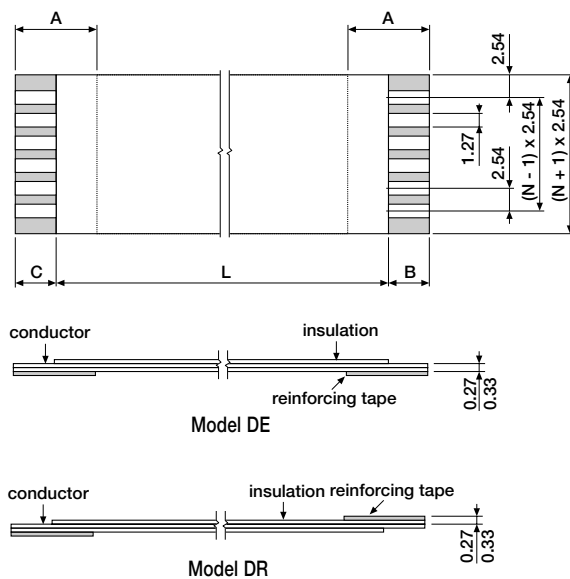

#### ORDERING INFORMATION

**FAJ-XXDE-XXXX-XXX0** DE model  
**FAJ-XXDR-XXXX-XXX0** DR model

supporting tape length in mm (A):  
 04, 06, or 08mm


striplength right side in mm (B):  
 03 to 06mm

striplength left side in mm (C):  
 03 to 06mm

cable length in mm:  
 30mm is min.

number of conductors:  
 02 to 20

### ■ 1.25mm spacing

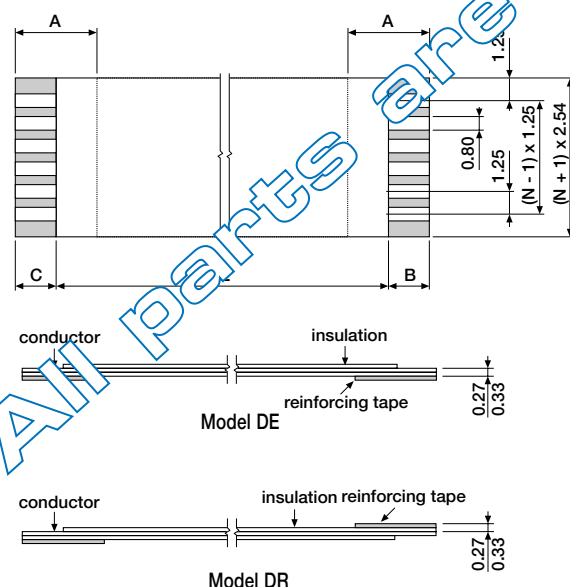

#### ORDERING INFORMATION

**FEJ-XXDE-XXXX-XXX0** DE model  
**FEJ-XXDR-XXXX-XXX0** DR model

supporting tape length in mm (A):  
 04, 06 or 08mm

striplength right side in mm (B):  
 03 to 06mm

striplength left side in mm (C):  
 03 to 06mm

cable length in mm:  
 30mm is min.

number of conductors:  
 02 to 40