




3.00mm and 5.00mm LED Mounts, Straight


Moulded, 12 and 15 Stations

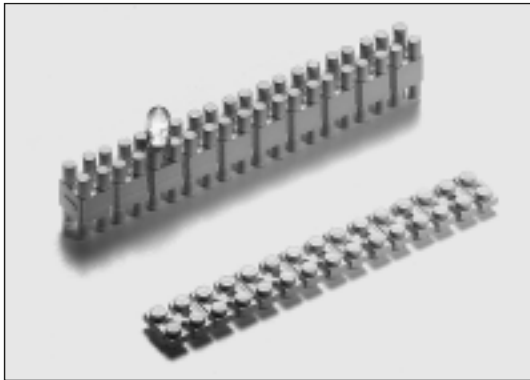

Moulded in one piece strips of 12/15 stations these 'strip mounts' are designed for mounting on 5.08 (T1) and 6.35 (T1¼) spacing. Couplings between individual mounts are easily cut, allowing to size arrays from 2 to 12/15 stations. 64 Heights available.

Material : 6/6 Nylon, UL 94V-2
Colour : White
Tolerances : All dimensions $\pm 0.13\text{mm}$

■ 3.00mm (T1), 15 stations

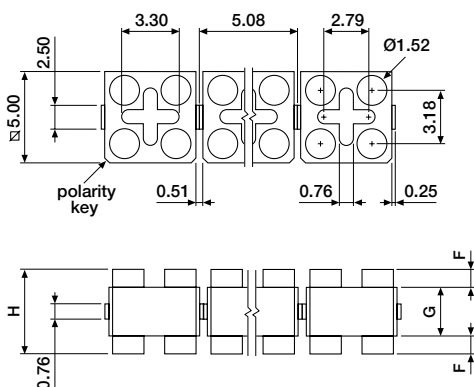

For 'F', 'G' and 'H' dimensions, please refer to ordering information.


ORDERING INFORMATION

BIV-5700-XXXX* G = 1.02mm, F = (H - G) 2
0120 for H = 1.52mm (min. height)
0420 for H = 5.33mm (max. height)

BIV-5701-XXXX* G = 3.81mm, F = (H - G) 2
0400 for H = 5.08mm (min. height)
0700 for H = 8.89mm (max. height)

*For each increment of 0.254mm the last four digits of the order number must be increased by 20.
Contact sales office for LED's holders assembled with LED's and see last pages of this chapter.

■ 5.00mm (T1¼), 12 stations

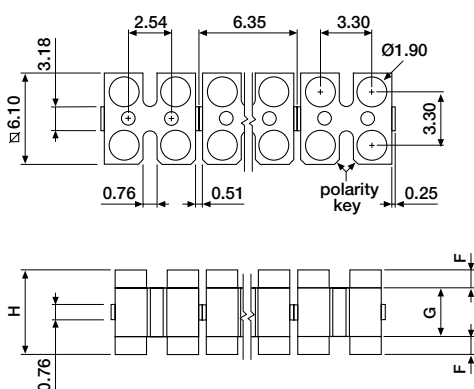

For 'F', 'G' and 'H' dimensions, please refer to ordering information.

ORDERING INFORMATION

BIV-5800-XXXX* G = 1.02mm, F = (H - G) 2
0120 for H = 1.52mm (min. height)
0420 for H = 5.33mm (max. height)

BIV-5801-XXXX* G = 3.81mm, F = (H - G) 2
0400 for H = 5.08mm (min. height)
0700 for H = 8.89mm (max. height)

*For each increment of 0.254mm the last four digits of the order number must be increased by 20.
Contact sales office for LED's holders assembled with LED's and see last pages of this chapter.