



3.00mm and 5.00mm LED Mounts, Straight


Moulded, Self-Retaining



Self-retaining design makes assemblies suitable for automatic insertion. Unique design of lead exit holes allows self retention and draining of cleaning solvents. Standard heights from 3.05mm to 22.86mm with various increments.

Material : 33% G.F. PPA UL 94V-0 (6105 series)
 Nylon 6/6 UL 94V-2 (6100 series)
 Nylon UL 94V-0 (6150 series)
 Colour : Black (6105, 6150 series)
 Natural (6100 series)
 Tolerances : Tolerances $\pm 0.13\text{mm}$

■ Height 3.05mm to 22.86mm

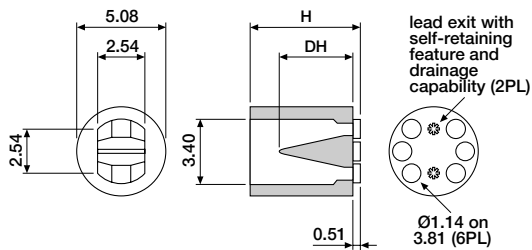

For 'DH' and 'H' dimensions please refer to ordering information.

ORDERING INFORMATION

BIV-6100-XXXX* standard
BIV-6105-XXXX* high temperature
 0240 for H = 03.05mm (min. height)
 1800 for H = 22.86mm (max. height)


*For each increment of 0.254mm the last four digits of the order number must be increased by 20.
 Contact sales office for LED's holders assembled with LED's and see last pages of this chapter.

The following heights are unavailable:
 0940, 1020, 1060, 1080, 1120, 1160, 1180, 1220, 1260, 1280, 1320, 1360, 1380, 1420, 1460, 1480, 1520, 1560, 1580, 1620, 1660, 1680, 1720, 1760, 1780.

DIMENSIONS

DH = 1.52mm (H = 3.05mm to 6.10mm)
 4.70mm (H = 6.35mm to 9.40mm)
 7.87mm (H = 9.65mm to 12.45mm)
 11.05mm (H = 12.70mm to 15.75mm)
 14.22mm (H = 16.51mm to 18.29mm)
 17.40mm (H = 19.05mm to 22.86mm)

■ Height 3.56mm to 22.61mm

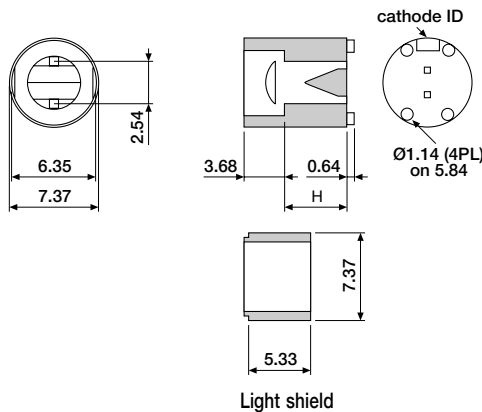

For 'H' dimensions please refer to ordering information

ORDERING INFORMATION

BIV-6150-XXXX* standard
 0280 for H = 03.56mm (min. height)
 1780 for H = 22.61mm (max. height)

BIV-6151-0000 light shield for 6150 series

*For each increment of 0.254mm the last four digits of the order number must be increased by 20.
 Contact sales office for LED's holders assembled with LED's and see last pages of this chapter.

The following heights are unavailable:
 0920, 0960, 1000, 1040, 1080, 1120, 1160, 1200, 1240, 1280, 1320, 1360, 1400, 1440, 1480, 1520, 1580, 1600, 1640, 1680, 1920, 1960.