




Rectangular LED Mounts, Straight


Moulded

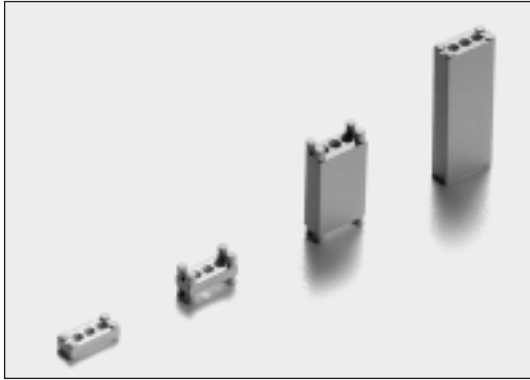

This simple, effective style is symmetrical for ease of assembly. Models can be used with 2 or 3 leaded LED's. Both sides with stand offs, allows rapid inspection and cleaning. 53 Heights are available.

Material : 6/6 Nylon, UL 94V-0
Colour : White
Tolerances : All dimensions $\pm 0.13\text{mm}$

■ 2.00 x 4.00/5.00mm, height 1.52mm to 8.89mm

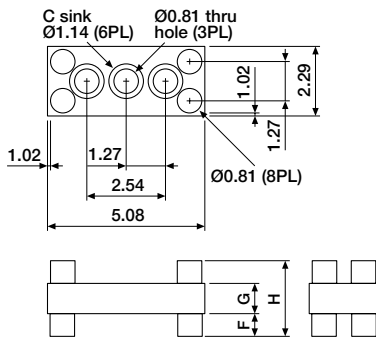


Self-retaining. For 'F', 'G' and 'H' dimensions, please refer to ordering information.

ORDERING INFORMATION

BIV-4900-XXXX*	G = 1.02mm, F = (H - G) ÷ 2
	0120 for H = 1.52mm (min.height)
	0420 for H = 5.33mm (max.height)
BIV-4901-XXXX*	G = 3.81mm, F = (H - G) ÷ 2
	0400 for H = 5.08mm (min.height)
	0700 for H = 8.89mm (max.height)

*For each increment of 0.254mm the last four digits of the order number must be increased by 20.
Contact sales office for LED's holders assembled with LED's and see last pages of this chapter.

■ 2.00 x 4.00/5.00mm, height 9.14mm to 19.30mm

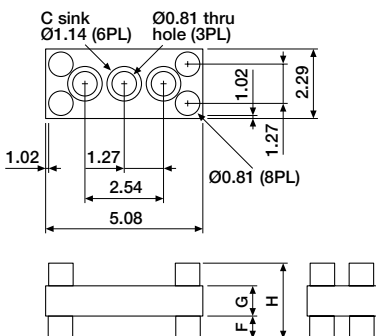

For 'F', 'G' and 'H' dimensions, please refer to ordering information.

ORDERING INFORMATION

BIV-4902-XXXX*	G = 8.64mm, F = (H - G) ÷ 2
	0720 for H = 9.14mm (min.height)
	1080 for H = 13.72mm (max.height)
BIV-4903-XXXX*	G = 13.72mm, F = (H - G) ÷ 2
	1120 for H = 14.22mm (min.height)
	1520 for H = 19.30mm (max.height)

*For each increment of 0.508mm the last four digits of the order number must be increased by 40.
Contact sales office for LED's holders assembled with LED's and see last pages of this chapter.