




Circular Clearance Spacers


Standard (Nylon) and Self-Retaining (PVC)

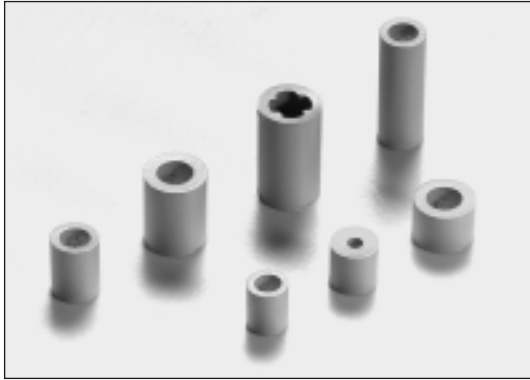

Seventeen basic I.D./O.D. combinations for the standard spacers and nine for the self-retaining models. Heights ranging from 0.76 to 31.75mm in 0.127mm increments and from 1.00 to 26.00mm in 1.00mm increments are available. Models 1250/51/52 and 1260 have a unique bi-material design.

Material : Nylon, UL 94V-2 (standard), PVC, UL 94V-0 (self-retaining)
Colour : White (standard), Grey, Natural (self-retaining)
Tolerances : O.D. / I.D. \pm 0.13mm
H \leq 12.70 \pm 0.13mm
H > 12.70 \pm 0.25mm

■ Nylon spacer O.D. 2.16mm to 3.76mm




ORDERING INFORMATION

BIV-4300-XXXX*	I.D. = 0.71mm, O.D. = 2.16mm
BIV-4301-XXXX*	I.D. = 0.81mm, O.D. = 2.16mm
BIV-4302-XXXX*	I.D. = 0.81mm, O.D. = 3.18mm
BIV-4303-XXXX*	I.D. = 1.19mm, O.D. = 3.18mm
BIV-4304-XXXX*	I.D. = 2.29mm, O.D. = 3.18mm
BIV-4305-XXXX*	I.D. = 2.16mm, O.D. = 3.76mm

0060 for H = 0.76mm (min. height)
2500 for H = 31.75mm (max. height)
4010 for H = 1.00mm (min. height)
4260 for H = 26.00mm (max. height)

*For each increment of 0.127mm (order no. ending with 0060 to 2500) or 1.00mm (order no. ending with 4010 to 4260) the last four digits of the order number must be increased by 10.

■ Nylon spacer O.D. 3.96mm to 4.75mm



ORDERING INFORMATION

BIV-4306-XXXX*	I.D. = 1.19mm, O.D. = 3.96mm
BIV-4307-XXXX*	I.D. = 1.60mm, O.D. = 3.96mm
BIV-4308-XXXX*	I.D. = 2.67mm, O.D. = 4.24mm
BIV-4309-XXXX*	I.D. = 1.60mm, O.D. = 4.75mm
BIV-4310-XXXX*	I.D. = 2.31mm, O.D. = 4.75mm
BIV-4311-XXXX*	I.D. = 3.18mm, O.D. = 4.75mm

0060 for H = 0.76mm (min. height)
2500 for H = 31.75mm (max. height)
4010 for H = 1.00mm (min. height)
4260 for H = 26.00mm (max. height)


*For each increment of 0.127mm (order no. ending with 0060 to 2500) or 1.00mm (order no. ending with 4010 to 4260) the last four digits of the order number must be increased by 10.



Circular Clearance Spacers

Standard (Nylon) and Self-Retaining (PVC)

■ Nylon spacer O.D. 5.84mm to 6.35mm

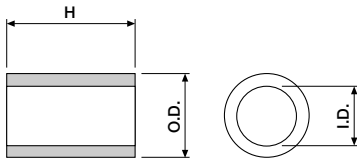


ORDERING INFORMATION

BIV-4312-XXXX*	I.D. = 3.43mm, O.D. = 5.84mm
BIV-4313-XXXX*	I.D. = 2.31mm, O.D. = 6.35mm
BIV-4314-XXXX*	I.D. = 3.18mm, O.D. = 6.35mm
BIV-4315-XXXX*	I.D. = 3.73mm, O.D. = 6.35mm
BIV-4316-XXXX*	I.D. = 4.34mm, O.D. = 6.35mm

0060 for H = 0.76mm (min. height)
 2500 for H = 31.75mm (max. height)
 4010 for H = 1.00mm (min. height)
 4260 for H = 26.00mm (max. height)

*For each increment of 0.127mm (order no. ending with 0060 to 2500) or 1.00mm (order no. ending with 4010 to 4260) the last four digits of the order number must be increased by 10.

■ PVC, self-retaining spacer O.D. 6.35mm

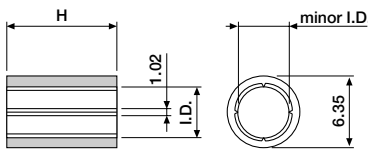


ORDERING INFORMATION

BIV-1200-XXXX*	I.D. = 4.11mm, M.I.D. = 2.84mm
BIV-1201-XXXX*	I.D. = 4.82mm, M.I.D. = 3.51mm
BIV-1202-XXXX*	I.D. = 4.82mm, M.I.D. = 4.17mm
BIV-1203-XXXX*	I.D. = 4.19mm, M.I.D. = 2.92mm
BIV-1204-XXXX*	I.D. = 4.82 mm, M.I.D. = 3.91mm

0100 for H = 1.27mm (min. height)
 2500 for H = 31.75mm (max. height)
 4020 for H = 2.00mm (min. height)
 4240 for H = 24.00mm (max. height)

*For each increment of 0.127mm (order no. ending with 0100 to 2500) or 1.00mm (order no. ending with 4020 to 4240) the last four digits of the order number must be increased by 10.

■ Bi-material PVC, self-retaining spacer O.D. 6.35mm

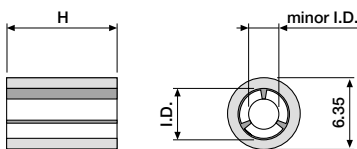

ORDERING INFORMATION

BIV-1251-XXXX*	I.D. = 4.06mm, M.I.D. = 2.67mm
BIV-1252-XXXX*	I.D. = 4.32mm, M.I.D. = 2.84mm
BIV-1253-XXXX*	I.D. = 4.83mm, M.I.D. = 3.30mm

0100 for H = 1.27mm (min. height)
 2500 for H = 31.75mm (max. height)
 4020 for H = 2.00mm (min. height)
 4240 for H = 24.00mm (max. height)


*For each increment of 0.127mm (order no. ending with 0100 to 2500) or 1.00mm (order no. ending with 4020 to 4240) the last four digits of the order number must be increased by 10.



Circular Clearance Spacers

Standard (Nylon) and Self-Retaining (PVC)

■ Bi-material PVC, self-retaining spacer O.D. 7.87mm

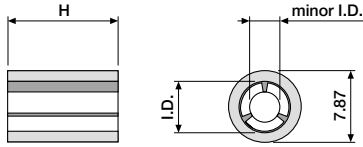

ORDERING INFORMATION

IV-1 0-XXXX*

I.D. = 5.33mm, M.I.D. = 3.73mm

0100 for H = 1.27mm (min. height)
2500 for H = 31.75mm (max. height)
4020 for H = 2.00mm (min. height)
4240 for H = 24.00mm (max. height)

OBSOLETE

*For each increment of 0.127mm (order no. ending with 0100 to 2500) or 1.00mm (order no. ending with 4020 to 4240) the last four digits of the order number must be increased by 10.