





Membrane Switches

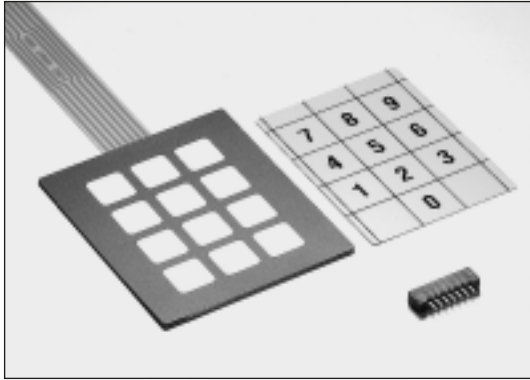

Four standard available membrane switches which are produced exclusively for Interkontakt. All membrane switches have an envelope opening for access of the included three inserts. One white insert is pre-printed with the figures 0 to 9. The other two inserts are blank (colours white and blue)


Thickness : $\pm 1.00\text{mm}$
 Operating Temp. : -30°C to $+65^\circ\text{C}$
 Life time : > 200.000 cycles
 Voltage : 05-30V DC
 Current : 100mA max.
 Operating Power : 1 Watt max
 Contact Resistance : $< 100\Omega$
 Contact Bounce : max 10 m/sec
 Opp. Force : 1.55 Newton $\pm 20\%$
 Switch Travel : 0.20mm

■ 12 (3 x 4) position model

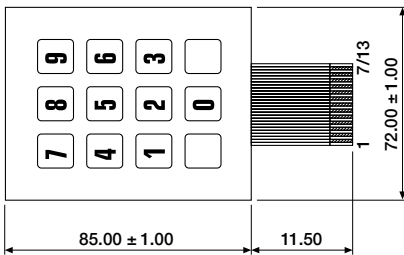


ORDERING INFORMATION

MBS-34MA-0901 common zero
MBS-34MA-9901 common zero incl. a 7 way FFC connector
MBS-34GN-0911 x-y
MBS-34GN-9911 x-y incl. a 13 way FFC connector

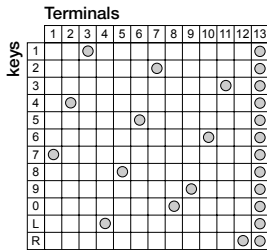

■ 16 (4 x 4) position model

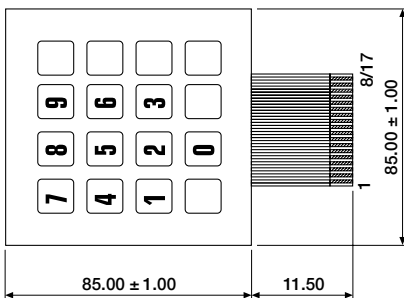

ORDERING INFORMATION

MBS-44MA-0921 common zero
MBS-44MA-9921 common zero incl. a 8 way FFC connector
MBS-44GN-0931 x-y
MBS-44GN-9931 x-y incl. a 17 way FFC connector

